

# 配电电器

## JF5系列


### 1 适用范围

JF5系列底座封闭型接线座适用于频率为50Hz(或60Hz)，额定电压至690V(660V)，或直流440V，额定截面积为0.5~25mm<sup>2</sup>的圆铜导线作连接之用。采用接线方便的组合螺钉配用TU，TO端头，及通用的G型安装轨。


符合标准：GB/T 14048.7 IEC 60947-7-1。



JF5-25/2

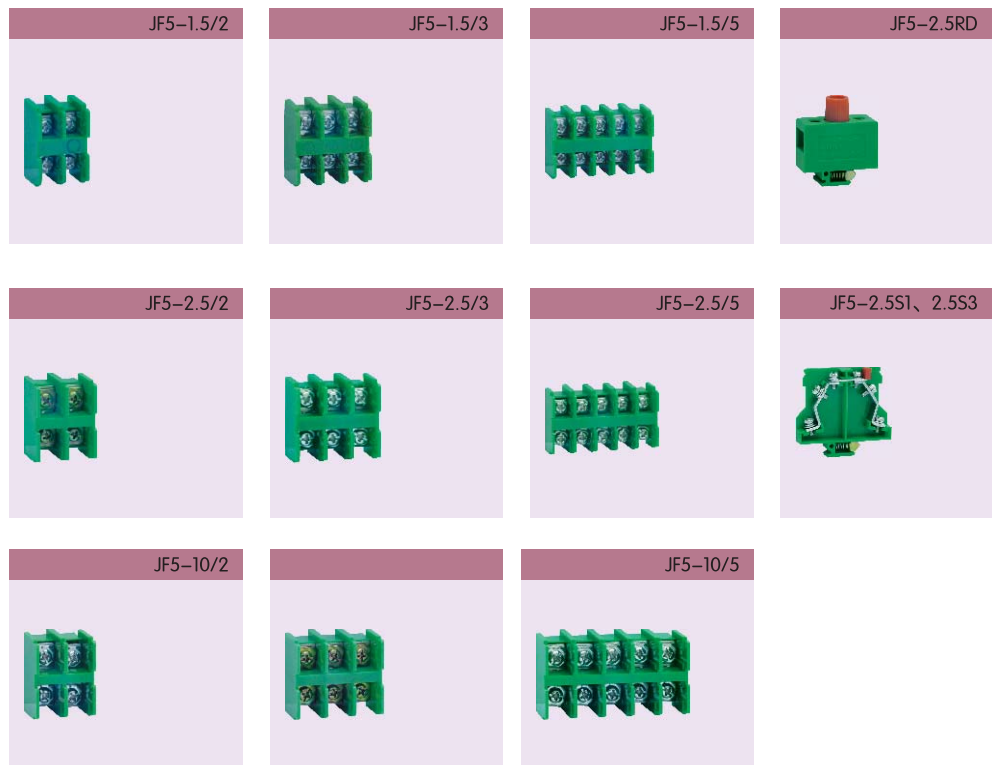

### 2 外形及安装尺寸

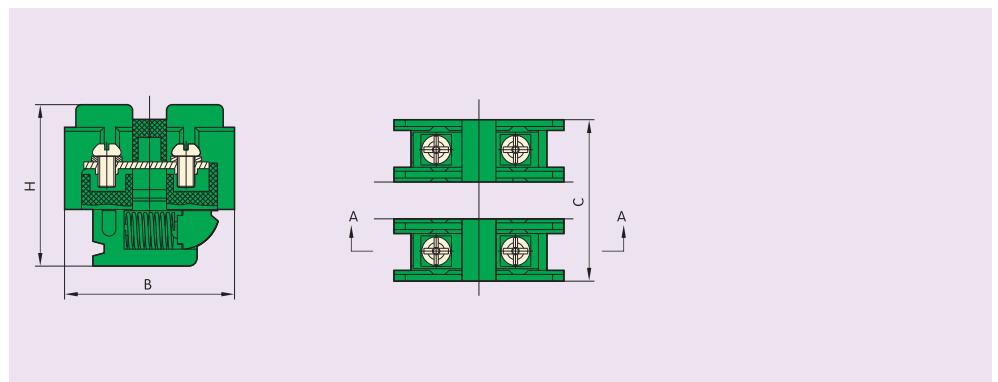

序号	产品型号	外形尺寸(mm)			安装轨型式
		B	C	H	
1	JF5-1.5/1	30	8	28.5	G
2	JF5-1.5/10	30	130	35	G
3	JF5-1.5/2	30	19.5	28	G
4	JF5-1.5/3	30	28.5	28	G
5	JF5-1.5/5	30	46.5	28	G
6	JF5-1.5/2L	18.5	17	11	G
7	JF5-1.5/3L	27.5	17	10	G
8	JF5-2.5/1	35	11	31	G
9	JF5-2.5/10	35	161	36	G
10	JF5-2.5/2	35	24.5	31	G
11	JF5-2.5/3	35	36	31	G
12	JF5-2.5/5	35	59	31	G
13	JF5-2.5/2L	19.5	18	10	G
14	JF5-2.5/3L	30	20	10	G
15	JF5-2.5S1/1	60.5	10.5	54	G
16	JF5-2.5S1/10	60	155	61	G
17	JF5-2.5S3/1	60.5	10.5	54	G
18	JF5-2.5S3/10	60	155	61	G
19	JF5-2.5RD/1	46	20	51.5	G
20	JF5-2.5RD/10	46	250	58	G
21	JF5-6/1	45	15	41	G
22	JF5-6/10	45	195	47	G
23	JF5-6/2	44	33	42	G
24	JF5-6/3	44	59	41	G
25	JF5-6/5	46	80	44	G
26	JF5-10/1	50	17	47.5	G
27	JF5-10/10	50	225	54	G
28	JF5-10/2	50	38	48	G
29	JF5-10/5	50	91	48	G
30	JF5-25/1	59	21.5	50	G
31	JF5-25/10	59	26.5	55	G
32	JF5-25/2	59.5	50	50	G
33	JF5-1.5B	31	11	30	G
34	JF5-2.5B	36.5	11	52	G

## 3 订货须知

3.1 订货时应注明产品的型号、接线面积或电流、类别、数量。

3.2 常规的接线端子由10片组装成1条。

3.3 对于有其它特殊要求应注明。

3.4 订货示例：JF5-2.5/1 5条

表示订货型号为JF5接线面积为2.5mm<sup>2</sup>类别为普通型总共数量为5条。